

Solid State Pressure Sensor

DIGITAL
OUTPUT




SLP Series - Model 33D

FEATURES

- Easy Design-in
- Temperature Compensated
- Calibrated & Amplified Output
- Low Cost

APPLICATIONS

- Process Control
- HVAC
- Consumer Electronics
- Medical Devices

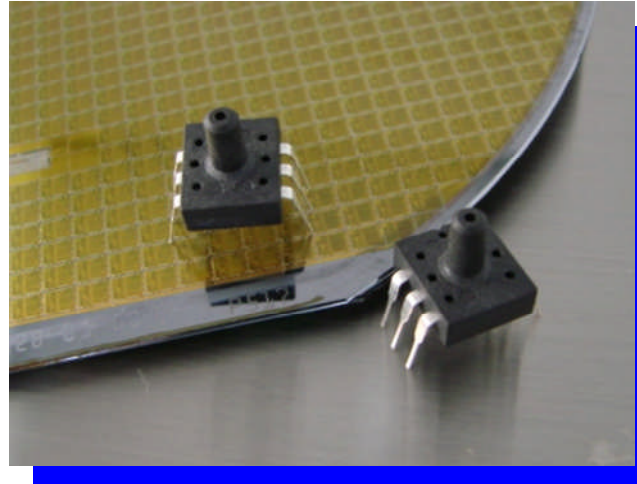

DESCRIPTION

The SLP 33D Series incorporates a silicon piezoresistive pressure sensor and signal conditioning ASIC in a 6-pin DIL plastic housing for easy through hole board assembly. A surface mount version is also available. Digital output of pressure is provided through a proprietary 1-wire interface. The Series provides a temperature compensated, calibrated digital pressure solution for high volume applications at an affordable cost. Pressure ranges are available from 0.3 to 100 psig. The low voltage version operates from 2.7 to 3.3V while the regular version operates from 4.5 to 5.5V. Pressure connection is through Tygon tube on the pressure port.

Custom calibrations are available please contact the factory for details.



Characteristics


Unless otherwise specified, all parameters are measured at 25 °C, 60% RH and 5 Vdc excitation

Parameters	Min	Typ	Max	Unit
Supply Voltage ^{NOTE 1}	2.7 to 3.3		4.5 to 5.5	Vdc
Supply Current			2.5	mA
Pressure range ^{Note 5}	5		100	psi
Resolution		14		Bit
Accuracy ^{NOTE 3}		±1.8		%FS, +1 LSB
Zero Output		0666		Hex
Full Scale Output		3996		Hex
Warmup Time ^{NOTE 4}		1	2	sec
Start-Up Time			10	ms
Sampling Rate		1000		Hz
Temp - Compensated	0		50	°C
Temp - Operating	-20		+85	°C
Temp - Storage	-40		+125	°C
Over Pressure			2X	FS

Notes:

1. Specify desired operating voltage range when ordering. Output is ratiometric to supply voltage
2. Wetted material contains RTV, PPA, glass and silicon
3. Accuracy includes non-linearity, hysteresis, TCS and TCO inside the compensated temperature range, best fit straight line definition
4. Zero fluctuation below 0.15%
5. See ordering guide for list of available pressure ranges

Dimensions

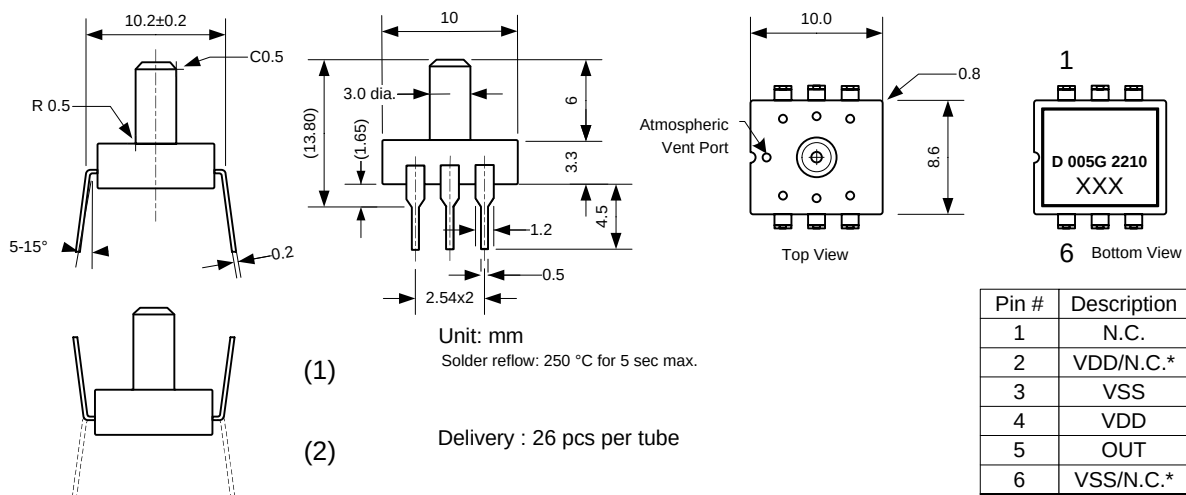


NOTE:

Pin 1 must be left floating.
A 0.1µF capacitor must be connected between Vdd and Vss
*For the 2, 3, 5 & 7 psi range, Pins 2 & 4 and Pins 3 & 6 must be shorted. Pins 2 and 6 must be N.C when using other ranges.




RM/1005/10F Ho King Comm Ctr,
2-16 Fa Yuen St. Mongkok Hong Kong,
Tel: +852 81973212
Email: info@senphire.com
www.senphire.com

Senphire Ltd. reserves the right to change specifications without prior notice

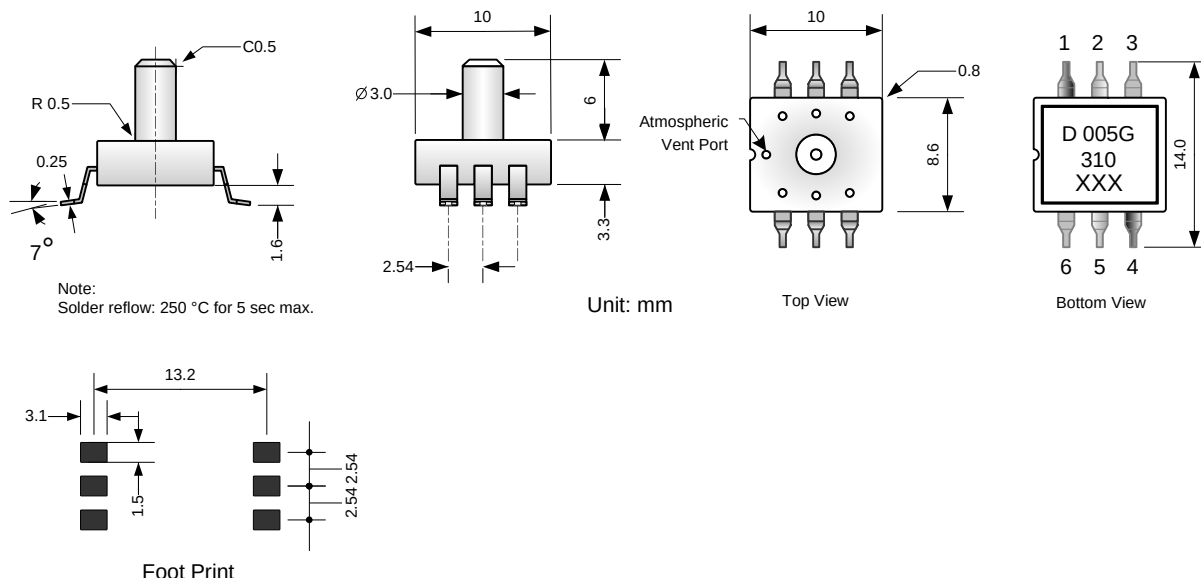

Ordering Information

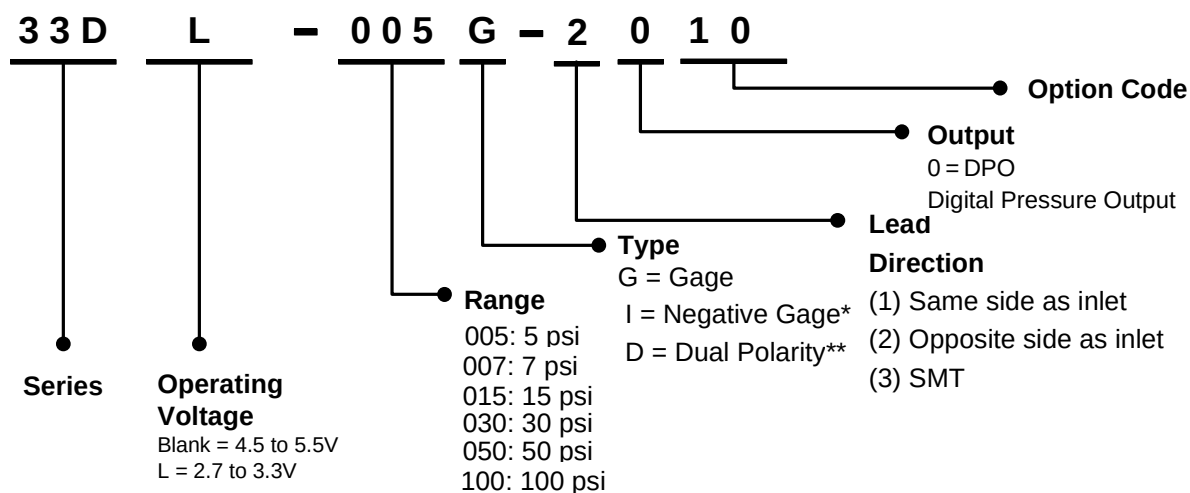

Notes

* Negative Gage Output has -XXX psi as the Full Scale output and 0 psi as the Offset. Maximum negative gage pressure is -15 psi

** Dual Polarity has +XXX psi as the Full Scale Output and -XXX psi as the Offset. Maximum Dual Polarity pressure is 30 psi

Disclaimer/Warranty/Notice

Senphire Ltd products are not authorized for use in applications where failure could result in loss of life or injury. While Senphire provides application assistance personally, through our literature and website, it is the responsibility of the customer to determine the suitability of the product for the intended application.

All information provided is believed to be accurate at the time of publishing however Senphire Ltd reserves the right to make changes without prior notice.

Senphire Ltd warrants its products to be free of manufacturing defects for a period of 12 months from the date of purchase. The maximum liability, expressed or implied shall be limited to a direct replacement of those products Senphire finds defective. The foregoing is the Buyers Sole remedy in lieu of all other warranties, expressed or implied including those of merchantability and fitness for a particular purpose.



RM/1005/10F Ho King Comm Ctr,
2-16 Fa Yuen St. Mongkok Hong Kong,
Tel: +852 81973212
Email: info@senphire.com
www.senphire.com

Ver 1.8 10 Sep 12

3/3