

Solid State Pressure Sensor

ANALOG
OUTPUT


SMP Series – Model 31A

FEATURES

- Low Cost
- Miniature SMD
- Absolute Pressure
- Small Foot Print
- High Sensitivity

APPLICATIONS

- Barometric Pressure
- Altimeter
- Medical Devices
- White Goods

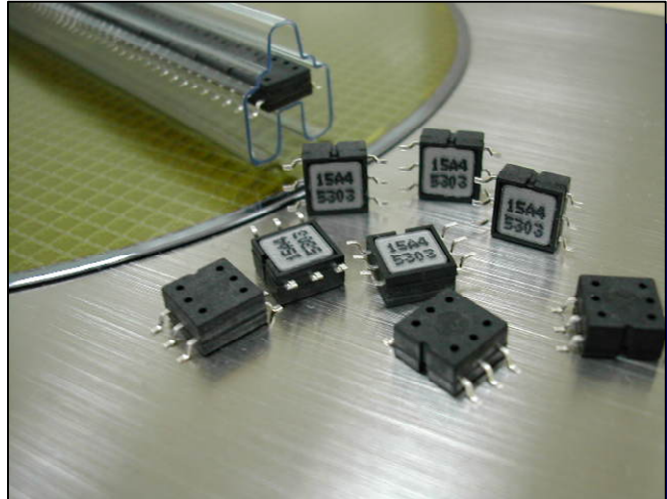

DESCRIPTION

The SMP31A Series are Fully compensated high performance die in a plastic surface mount package. They are absolute pressure sensors fabricated by bonding a micromachined silicon diaphragm to Pyrex glass in a vacuum. Uniform span and offset distribution result from precise implant and etching control. The result is long-term offset stability that is suitable for barometric pressure measurement.

The output is compensated via on board signal conditioning using the latest digital ASIC technology.

The small package makes this an ideal product for customers looking for compensated absolute pressure measurement in the smallest possible surface mount package.

In order to provide maximum flexibility, the sensors are available with several custom features including pressure range, impedance and pin out configuration.

For custom products, please contact the factory.



Characteristics

Unless otherwise specified, all parameters are measured at 5V excitation, 25 °C and 60% RH


Parameters	Min	Typ	Max	Unit
Supply Voltage ^{Note 3}	2.7 to 3.3		4.5 to 5.5	Vdc
Supply Current			2.5	mA
Pressure Range ^{Note 4}	15		30	psi
Zero Output (Offset)	0.428	0.500	0.572	Vdc
Full Scale Output	4.428	4.500	4.572	Vdc
Output Current of Buffer			2.2	mA
Accuracy ^{NOTE1}			1.8	%FS
Over Pressure ^{Note5}			2X	Rated Pressure
Response Time		1	2	ms
Temp - Compensated	0		50	°C
Temp - Operating	-20		+85	°C
Temp - Storage	-40		+125	°C

Notes:


1. Accuracy includes non-linearity, hysteresis, TCS, TCO inside the compensated temperature range, Best Fit Straight Line definition
2. Wetted material contains Au, RTV, PPA, glass and silicon
3. Specify desired operating voltage range when ordering. Output is Ratiometric to supply Voltage
4. See ordering guide for list of available pressure ranges
5. Over-pressure is 1.5x for 30 psi range

Pin #	Description
1	N.C.
2	Sig
3	V _{DD}
4	V _{SS}
5	V _{SS}
6	N.C.

Dimension

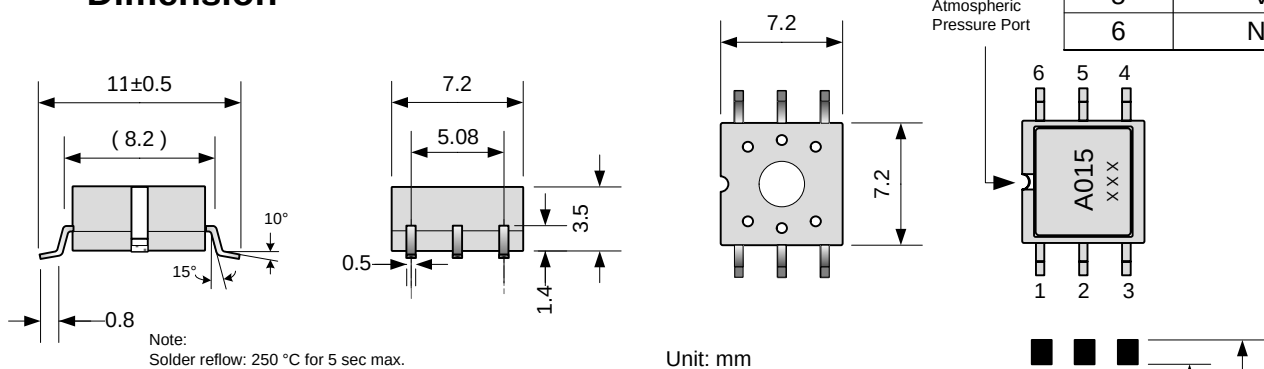

Ordering Information

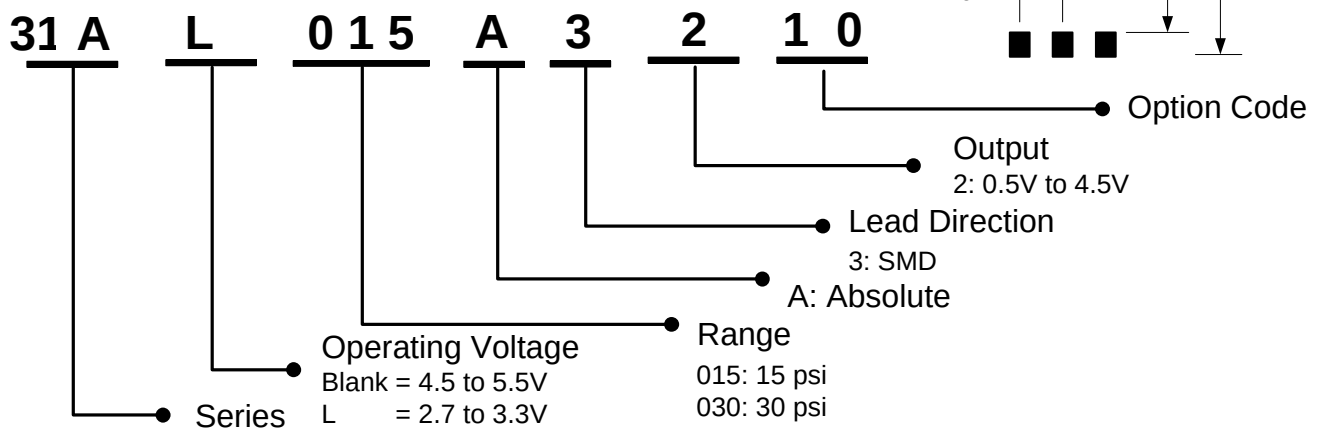

RM/1005/10F Ho King Comm Ctr,
2-16 Fa Yuen St. Mongkok Hong Kong,
Tel: +852 81973212
Email: info@senphire.com
www.senphire.com

Disclaimer/Warranty/Notice

Senphire Ltd products are not authorized for use in applications where failure could result in loss of life or injury. While Senphire provides application assistance personally, through our literature and website, it is the responsibility of the customer to determine the suitability of the product for the intended application.

All information provided is believed to be accurate at the time of publishing however Senphire Ltd reserves the right to make changes without prior notice.

Senphire Ltd warrants its products to be free of manufacturing defects for a period of 12 months from the date of purchase. The maximum liability, expressed or implied shall be limited to a direct replacement of those products Senphire finds defective. The foregoing is the Buyers Sole remedy in lieu of all other warranties, expressed or implied including those of merchantability and fitness for a particular purpose.

The rest of this page has been left intentionally blank



RM/1005/10F Ho King Comm Ctr,
2-16 Fa Yuen St. Mongkok Hong Kong,
Tel: +852 81973212
Email: info@senphire.com
www.senphire.com

3/3

Ver 1.1 7 Apr 14